


## A2518 SERIES

2.5mm pitch wire to board or wire to wire connector




### Specifications

Current rating:3A AC,DC  
Voltage rating:500V AC,DC  
Temperature range:-40°C~+105°C  
Contact resistance:20mΩMax.  
Insulation resistance:500MΩMin.  
Withstanding voltage:1000V AC/minute  
\*Compliant with RoHS and REACH\*  
\*Meet the HF/Halogen Free,need to customize\*  
\*Contact for details\*

### Standards



### Assembly layout



# A2518 SERIES



2.50mm pitch wire to board connector

## A2518H-T

2.50mm Pitch Crimp Terminal

### Reference Informations:

\*Material:Pin:Brass/Tin over Nickel  
Insulator:Nylon 66 ,UL94V-0

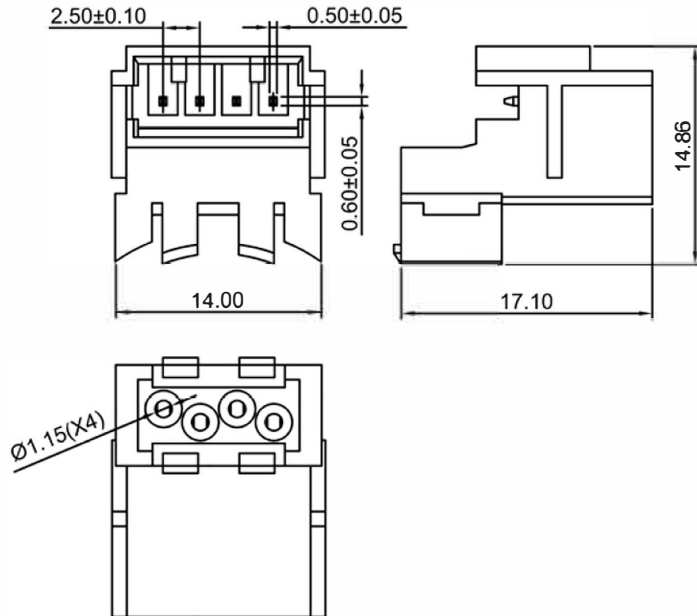

### Ordering Information:

A2518H-NP-□-□-□-□  
1 2 3 4

- 1.Material:  
0=Nylon 66,UL94V-0
- 2.Color code:  
NA:Natural
- 3.Pin information:  
TB=Brass Tin-plated
- 4.Client code